


Produktdatenblatt Technical Datasheet SR868

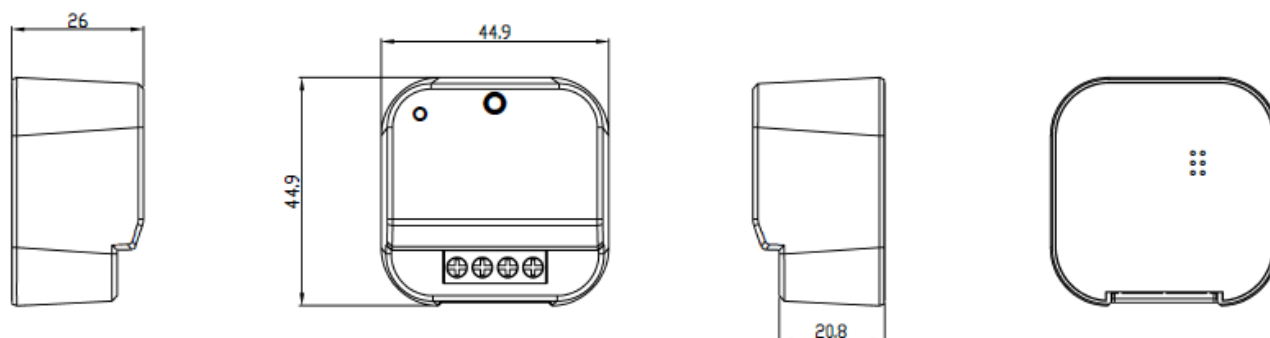

Funkrelais

Das SALUS Funkrelais wird direkt in einer Unterputzdose montiert. Er ermöglicht es strombetriebene Heizgeräte per Funk mit einem RT-Regler von Salus mit 868MHz Frequenz zu steuern.

RF-Relay

The SALUS RF-Relay is installed directly into a wallbox outlet. It enables you to control any electrical Heating via any Thermostat with 868MHz RF.

Technische Informationen :

Produktname Funkrelais SR868
Abmessungen 44,9/44,9/26 in mm (L/B/H)
Eingangsspannung 230 V AC, +/-10% , 50Hz
Schaltleistung 16(5)A

Ungefähr 3.500 Watt

Frequenz 868MHz
Schutzklasse IP30

Technical information :

Product name RF-Relay SR868
Dimensions 44,9/44,9/26 in mm (L/W/H)
Input Voltage 230 V AC, +/-10% , 50Hz
Switching capacity 16(5)A

Frequency 868MHz
IP Rating IP30

Produktdesign / Productdesign

RT310SR



RT510SR



SR868



Date/Version

30.08.2018 – 1.1

Technical disclaimer

Alle Rechte vorbehalten. Technische Änderungen vorbehalten.
We reserve the right to alter our products without notice.
This also applies to products already on order provided
that such changes do not change the functionary
of the product

Kontakt

Salus Controls GmbH
Dieselstraße 34, Mühlheim am Main
D-63165, Germany
Tel: +49 (0) 6108 825850
info@salus-controls.de